



RENEW your pool in 3 easy steps

1




Prepare and patch

2



Apply the pool coats

3

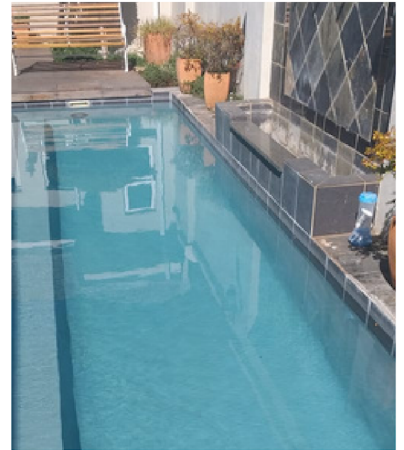

Allow to cure and fill

Pool RENEW

Pool RENEW is available in a range of popular colours including White, Blue and Charcoal

Pool RENEW waterproofs, covers cracks and promotes easy cleaning and low algae growth

Samson products required are:

1. PatchMortar P and P3 Primer to repair break-outs
2. Pool RENEW in your selected colour
3. HydroHalt for rapid set repair of leaking areas
4. CrystalSkim WR (with crystalline waterproofing for thicker applications)
5. MM Sealer Siloxane for increased water repellency and acid resistance

PREPARATION

The pool walls and floor must be carefully cleaned to remove all traces of algae.

Any spores or delamination must be identified (this is facilitated by chain dragging) and separately repaired. The walls and floor must be thoroughly sand-papered with a rough grit to remove any powdering or weak surfaces down to sound material. Dust must be removed by washing down the walls and floor. Severe cracks or leaks must be separately treated with the appropriate Samson System.

Once a clean, sound and repaired surface is achieved the next process of installing the coating may commence.



APPLYING THE COATING

Pool RENEW is supplied in 12.5kg hermetically sealed bags for handmixing 10L of coating when mixed with 5L of water.

Using a suitable drill and paint mixer, stir the water and use a scoop to put the powder into the vortex. Adding the powder slowly avoids the creation of lumps, agitation must be continuous while the powder is being added. Once a smooth, creamy consistency is reached, the product is ready to apply.



Brush application is preferred and you should start at one end of the pool and progress to the other end, preferably without interrupting the application process (this avoids any wet to dry joints between application).

If chosen a second coat of Pool RENEW may be applied as soon as the first coat has set.

The Samson Siloxane Primer and MM Sealer may then be applied for extra water repellency and chemical resistance.

CURING AND FILLING

The completed Pool RENEW application should be allowed to air cure for a few days before filling the pool.

WARNING: The Pool RENEW process is best carried out when no rain is forecast for about a week, since if it rains during application, the water soluble coating will be washed off the wall.

Consult Pool RENEW technical services if additional advice is required.

**Enjoy swimming in your RENEWed Pool
with a non-slip floor finish!**

Samson

